

FlexFold LP300-400







The FlexFold LP300-400 is a flatwork folder able to fold the complete range of small and large flatwork linen such as sheets, duvets, table linen, napkins, pillow cases etc.

The FlexFold LP300-400 differs from other folders because of its simple yet durable design which achieves both high quality folding and high production rates. The FlexFold LP300-400 is available in single and multi lane configurations. In either configuration, the FlexFold LP300-400 makes 2 or 3 primary folds in up to 4 lanes and 1, 2 or 3 (internal) cross folds. Each piece is measured before it enters the first primary fold. The microprocessor selects the appropriate primary fold accordingly. Once folded, the piece is measured again prior to entering the cross fold section to accomplish the desired cross fold. After the cross folds are made, the piece is discharged towards the stacker station. The folder can be supplied with either rotary type stackers or drop-stackers which are available either as single or double units. It is also possible to work without a stacker and deliver onto a delivery table.



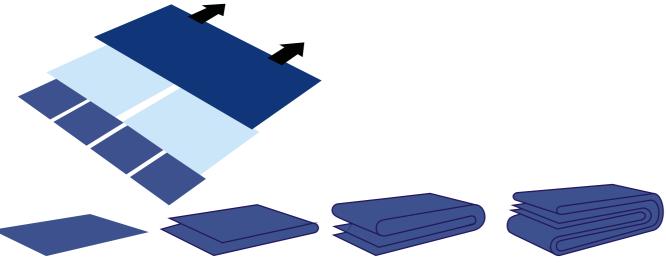



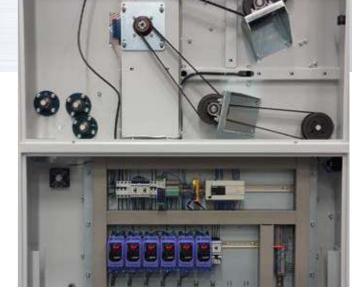

LATERAL FOLD PRINCIPLE

The laterals folds are carried out by air knives forcing the linen between two pinch rollers. The folded pieces are then transferred between conveyor belts to the next lateral fold. The use of double air tubes delivers unbeatable consistency and quality. The length is measured before entering the lateral fold section by means of

maintenance-free photocells (no reflectors). The FlexFold LP300-400 is a machine built for life and requires little maintenance in comparison with competing folders. The drive system of the lateral fold section is done by maintenance-free timing belts.





CROSS FOLD PRINCIPLE

The first cross fold rollers are both driven by a frequency controlled motor. The first cross fold has an effective opening size of 900 mm, thus enabling pieces of 3400 mm to be folded with 2 lateral folds.

The rollers of the first cross fold open automatically when a jam occurs. The size of the primary folded pieces are checked at the first cross fold and crooked pieces are automatically detected and rejected. The first cross fold is made by knife and the second

and the third cross folds are made by reversing belts in combination with a knife. Both light as well as thick items can be processed against highest folding quality. By means of automatic wide measurement it is possible to bypass the third cross fold for small items, while it is enabled for large items.

The FlexFold LP300-400 can also be provided without a cross fold section, so acts as primary folder only.



The FlexFold LP300-400 is a flatwork folder able to fold the complete range of small and large flatwork linen such as sheets, duvets, table linen, napkins, pillow cases etc.

The FlexFold LP300-400 differs from other folders because of its simple yet durable design which achieves both high quality folding and high production rates. The FlexFold LP300-400 is available in single and multi lane configurations. In either configuration, the FlexFold LP300-400 makes 2 or 3 primary folds in up to 4 lanes and 1, 2 or 3 (internal) cross folds. Each piece is measured before it enters the first primary fold. The microprocessor selects the appropriate primary fold accordingly. Once folded, the piece is measured again prior to entering the cross fold section to accomplish the desired cross fold. After the cross folds are made, the piece is discharged towards the stacker station. The folder can be supplied with either rotary type stackers or drop-stackers which are available either as single or double units. It is also possible to work without a stacker and delivery onto a delivery table.



